



## Powersine

professional DC to AC true sine wave inverter

**Description** | The PS600-12, PS800-24 and PS800-48 professional DC to AC true sine wave inverters, offer superior performance for a wide range of applications. Unlike many other inverters, the very clean and interference free output of a Powersine inverter ensures correct operation of sensitive equipment like displays, test equipment and battery chargers.

The very robust electronic and mechanical design, make the Powersine inverter series the best choice for reliability. Designed for an extremely long lifespan and protected against short circuits, overloading and high temperatures, a Powersine inverter will deliver trouble free operation for many years.

The newest available technology results in extremely efficient operation with very low 'no-load' consumption. The Automatic Standby Function (ASB), standard in all Powersine inverters, will even reduce the no-load consumption by an extra 70%!

All Powersine inverters are easy to install and operate. Each Powersine inverter comes standard with DC cables and a very clear installation and operating instruction manual.

## Features

- True sine wave AC output
- Robust design
- High surge power output
- Very efficient
- Protected against low battery voltage, high temperature, overload and short circuit
- Automatic Standby function to reduce no-load power consumption
- Variable speed fan for silent operation
- Schuko type AC outlet (other outlet types are optionally available)
- Remote on/off capability
- 1.5 meters DC connection cable included
- CE and e-mark certified
- 24 month warranty

## Applications

- Recreational vehicles
- Marine applications
- Solar power systems
- Industrial systems
- Mobile entertainment systems
- Service vehicles
- Remote homes

## Designed to power your..

- TV
- Desktop/Notebook computer
- Battery charger
- Portable work light
- Test & measurement equipment
- DVD/Blu-ray player
- Cell/Smart phone charger
- Thermal printer
- Small kitchen appliance
- Electric tool

Parameter		PS600-12 (art. no. 5004000-1)	PS800-24 (art. no. 5004100-1)	PS800-48 (art. no. 5004300-1)
Output power <sup>1)</sup>	Pnom	500W	600W	600W
	P10minutes	600W	800W	800W
	Psurge	1000W	1200W	1250W
Output voltage		230Vac ± 2% (115Vac ± 2% optional)		
Output frequency		50Hz ± 0.05% (60Hz ± 0.05% optional)		
Output waveform		True sinewave (THD < 5% <sup>1)</sup> @ Pnom)		
Admissible cos φ of load		0.2 – 1 (up to Pnom)		
Input voltage (±3% tolerance) :	Nominal	12V	24V	48V
	Range	10.5 <sup>2)</sup> – 16Vdc	21 <sup>2)</sup> – 31Vdc	41 <sup>2)</sup> – 60Vdc
Maximum efficiency		92%	93%	94%
No load power consumption <sup>3)</sup> [ASB]		<4.8W [0.4W]	<6.5W [0.7W]	<8.2W [0.5W]
ASB threshold		Pout=15W		
Operating temperature range (ambient)		-20°C ... +50°C (humidity max. 95% non condensing)		
Storage temperature range		-40°C ... +80°C (humidity max. 95% non condensing)		
Cooling		Variable speed fan controlled by temperature and load		
TBSLink enabled		No		
Protected against		Short circuit, overload, high temperature, low battery voltage		
Indications		Power on, error and ASB mode		
DC input connections		Two wires, length 1.5 meters, 10mm <sup>2</sup>		
AC output connections		Schuko outlet <sup>4)</sup>		
Enclosure body size		228 x 113 x 163mm (without mounting brackets)		
Total weight		6.2 kg		
Protection class		IP20		
Standards		CE marked meeting EMC directive 2004/108/EC and LVD 2006/95/EC complying with EN60335-1, e4-95/54/EC, RoHS 2002/95/EC		

Note: the given specifications are subject to change without notice.

<sup>1)</sup> Measured with resistive load at 25°C ambient. Power ratings are subject to a tolerance of 4% and are decreasing as temperature rises with a rate of approx. 1.2%/°C starting from 25°C

<sup>2)</sup> Undervoltage limit is dynamic. This limit decreases with increasing load to compensate the voltage drop across cables and connections

<sup>3)</sup> Measured at nominal input voltage and 25°C

<sup>4)</sup> Also available are the following AC outlet types :




BS 1363




AS/NZS 3112

## Dimensions

Front view



Top view

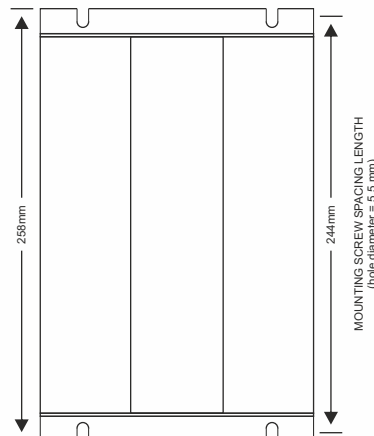

Side view

